
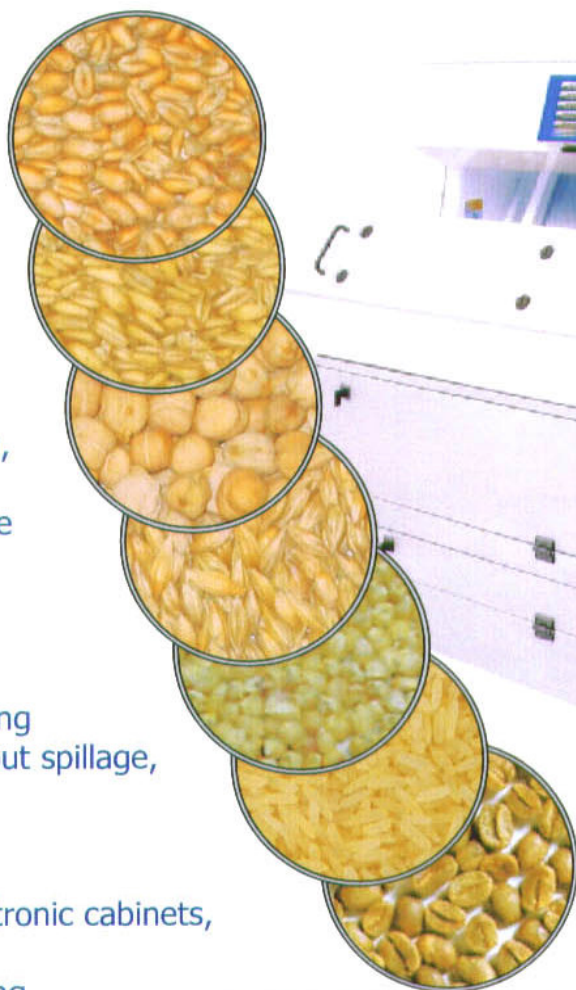


AlphaScan II™

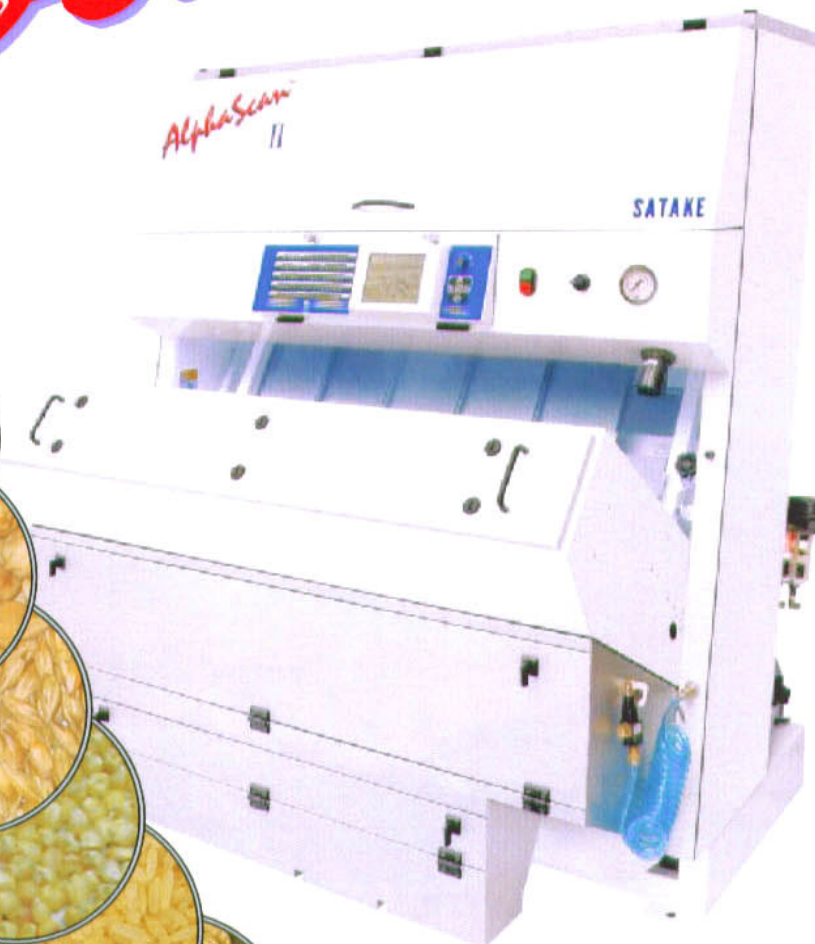

- High capacity at low cost, (High Flow Version offering capacities up to 35 T/h)
- Self monitoring with auto calibration during operation,
- Lamp heating for immediate start up in cold weather,
- Multi-lingual touch screen,
- Sampling trays fitted allowing accept to be sampled without spillage,
- Small footprint,
- Dust proof optical and electronic cabinets,
- High speed digital processing technology,
- New Nozzle Bar improving ejection & reducing good products in the reject,
- New Feeders with feedback control for more constant feed rates,
- Conversions/upgrades from ASII 32 to 64 and 96,
- Technical support available from Satake-ESM group worldwide.

Applications

Wheat, Rice and other cereals, seeds, coffee beans, corn, pulses and many others.



TECHNICAL SPECIFICATIONS

		ASII-32	ASII-96	ASII-160
Chutes	quantity	1	3	5
Width	mm	1050	1050	1355
Depth	mm	1045		
Height	mm	1565		
Weight	kg	230	370	475
Electricity	VAC	220 +/-10%	220 +/-10%	220 +/-10%
	VA	700	1200	1500
	Hz	50/60		
Air Consumption (Max)	Litres/sec	7	21.2	35.4
Air Pressure	Bar	6	6	6

TYPICAL CAPACITIES

(Kg/h)	ASII-32	ASII-96	ASII-160
Rice	1 200 - 3 200	3 600 - 9 600	6 000 - 16 000
Wheat	1 200 - 3 200	3 600 - 9 600	6 000 - 16 000
Coffee (robusta)	1 000 - 2 000	3 000 - 6 000	5 000 - 10 000
Seeds	500 - 2 000	1 500 - 6 000	2 500 - 10 000
Corn/Maize	1 000 - 3 000	3 000 - 9 000	5 000 - 15 000



USA

Satake USA Inc.
 10905 Cash Road
 Stafford, TX 77477, USA
 Tel: +1 281 276 3600
 Fax: +1 281 494 1375
 E-mail: vision@satake-usa.com
www.satake-usa.com

EUROPE

Satake-ESM (UK) Ltd.
 Horsfield Way, Bredbury
 Stockport SK6-2FN, U.K.
 Tel: +44 161 406 3888
 Fax: +44 161 406 3889
 E-mail: bshaw@satake-esm.com
www.satake-esm.com